

DESCRIPTION

Replacement filter elements for fluidtech® oil mist separators (demister)

APPLICATION

De-oiling of exhaust air from the crankshaft chamber of internal combustion engines or removal of oil mist when venting large oil tanks (e.g. bearing lubrication of turbo machines).

MATERIALS

Filter media: fibrous special filter material, PES and glass fiber fleece Inner and outer support perforated stainless steel plate.


Cast-on end seals: Sealing is accomplished through the use of either a cast-on sealing bead with oil resistant 2K-silicone

DESIGN

Flow from outside inwards (stability against collapse is achieved by filter-side inner supporting bodies).

WORKING TEMPERATURE

From 0° to 120°C

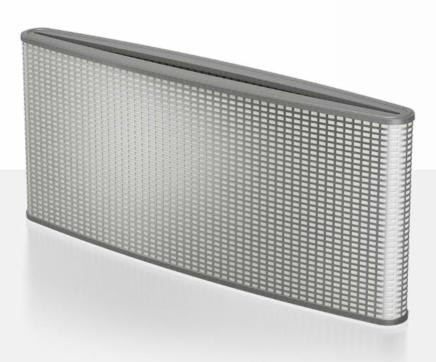



1 friedrichsfilter.com